



Precision • Innovation • Perfection



Digital Angle Torque Adapter



# Product Features



## Other Specification

Operating temperature» -10°~ 60°

Storage temperature» -20°~ 70°

Humidity» Up to 90% non-condensing

Battery Life(standard mode)» 1 year

Battery Llife(continuous operation)» 37 hrs.

Drop test» 1m


Shaking test» 10G

Service life test» 10000 cycles

Environmental test» PASS

EMC test» PASS

## LCD Backlight Display

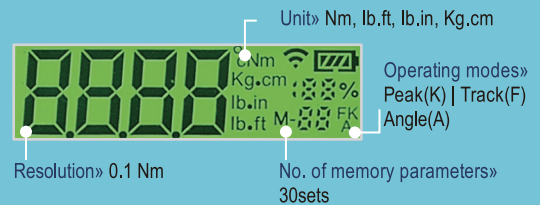

## SH-DGTSA SERIES

# Digital Angle Torque Adaptor

Accuracy» CW:±1.5% | CCW:±2.5%

Min. Scale Unit» 0.1Nm

Min. Angle:1° | Max. Angle:720° | Setting Range:1°~720°

## SPECIFICATION

Model No.	Inches	Max. Operating Range	Setting Range	Max. Torque Load / DIN Standards (Nm)
SH-DGTSA135-2	3/8"	135 Nm	6.8~135 Nm   5.0~99.5 lb.ft   60~1195 lb.in   69~1378 kg.cm	306.0/202.0
SH-DGTSA200-3	1/2"	200 Nm	10~200 Nm   7.4~147.5 lb.ft   88~1770 lb.in   102~2041 kg.cm	796.0/512.0
SH-DGTSA340-3	1/2"	340 Nm	17~340 Nm   12.5~250.7 lb.ft   150~3009 lb.in   173~3469 kg.cm	796.0/512.0



## Packing Specification

Model No.	Wrench Length (Size)	Wrench Weight (kg)	Box Size L x W x H (cm)	Quantity (pcs)	N.W (kg)	G.W (kg)	CARTON L x W x H (cm)	CUFT
SH-DGTSA135-1	75x50x39 mm	0.21	113x105x67	10	5.04	5.08	34.3x22.4x13	0.35
SH-DGTSA200-2	75x50x39 mm	0.21	113x105x67	10	5.04	5.08	34.3x22.4x13	0.35
SH-DGTSA340-2	75x50x39 mm	0.21	113x105x67	10	5.04	5.08	34.3x22.4x13	0.35